SAFESPOT
ARCHITECTURAL PRODUCTS PTY LTD

Technical Data Sheet

Anti-Slip Abrassive Inlay
50mm x 8mm

PRODUCT DESCRIPTION	Anti - Slip Abrasive Inlay is a composite material with hard wearing silicon carbide anti slip grit, suitable for installation in pre-grooved timber or concrete stairs. The material is suitable for high exposure to salt water and offers high resistance to chemicals such as acid, alkali and solvent liquid.

Material	Composite material with hard wearing silicon carbide anti slip grit.
Colour	Black

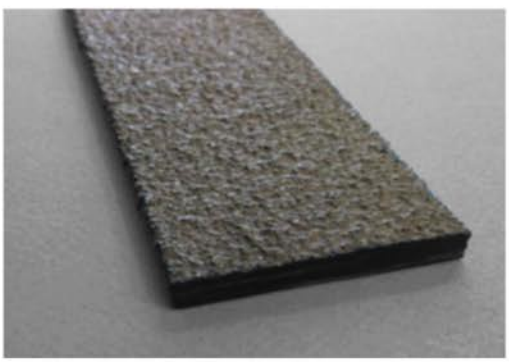

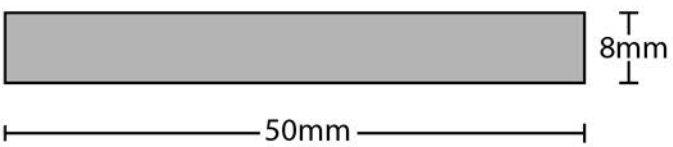

Slip Resistance Testing

See Australian Standards Hand Book 198: 2014 (HB 198), "An Introductory Guide to Slip Resistance of Pedestrian Materials" in order to determine a classification of a slip resistance rating. This document outlines the minimum ratings of location and situation of a pedestrian surface.

TEST	AS/NZS 4586:2004 Appendix A

TYPE	Wet Pendulum Test
RATING	Four S slider Mean BPN = 78 Class = P5

TEST	AS/NZS 4586:2004 Appendix D

TYPE	OIL-WET Ramp
RATING	Mean overall acceptance angle = 35^0 Class R13

Luminance Testing

Compliance for Luminance contrast varies with colour tactile and the substrate onto which you wish to have them installed. Certification of compliance would require testing of the tactile on your surface.

Safespot Architectural Products Pty Ltd
42-46 Moore St, Leichhardt NSW 2040
Ph: 02_ 9518 8011
E: sales@safespot.com.au