

Aluminium Stair Nosing

W75mm x H10mm x T2mm/60mm Carborundum Tape Insert

PRODUCT DESCRIPTION

Aluminium stair nosing with carborundum tape insert. Offers high slip resistance and is suitable for all stable indoor and outdoor substrates. Available in clear and black anodised aluminium.

Material



Aluminium Alloy - Hard Anodised

Colour

Black/Clear

Tape insert colour

Black/Yellow

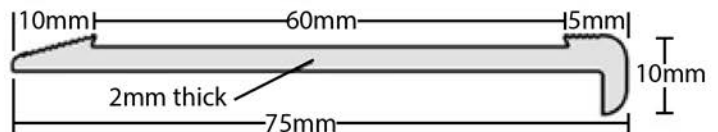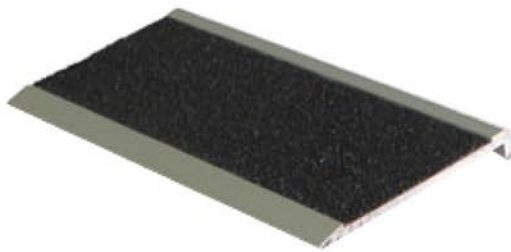

Slip Resistance Testing

See Australian Standards Hand Book 198: 2014 (HB 198), "An Introductory Guide to Slip Resistance of Pedestrian Materials" in order to determine a classification of a slip resistance rating. This document outlines the minimum ratings of location and situation of a pedestrian surface.

TEST

AS/NZS 4586:2004 Appendix A

TYPE

Wet Pendulum Test

RATING

Four S slider Mean BPN = 78 Class = P5

TEST

AS/NZS 4586:2004 Appendix D

TYPE

OIL-WET Ramp

RATING

Mean overall acceptance angle = 35° Class R13

Luminance Testing

Compliance for Luminance contrast varies with colour tactile and the substrate onto which you wish to have them installed. Certification of compliance would require testing of the tactile on your surface.