



Aluminium Stair Nosing

W75mm x H10mm x T3mm/ four strip carborundum inserts

PRODUCT DESCRIPTION

Aluminium stair nosing with four strip carborundum inserts. Offers high slip resistance and is suitable for all stable indoor and outdoor substrates. Available in clear and black anodised aluminium.

Material	Aluminium Alloy - Hard Anodised
Colour	Black/Clear
Tape insert colour	Black/Yellow

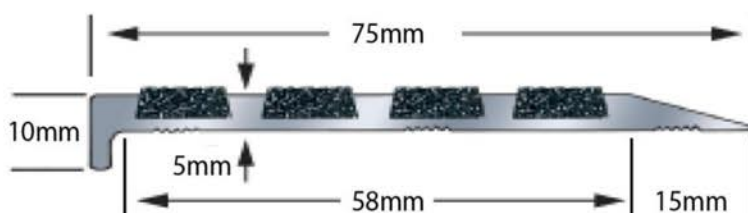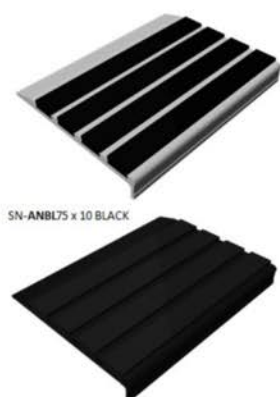

Slip Resistance Testing

See Australian Standards Hand Book 198: 2014 (HB 198), "An Introductory Guide to Slip Resistance of Pedestrian Materials" in order to determine a classification of a slip resistance rating. This document outlines the minimum ratings of location and situation of a pedestrian surface.

TEST	AS/NZS 4586:2004 Appendix A
TYPE	Wet Pendulum Test
RATING	Four S slider Mean BPN = 78 Class = P5
TEST	AS/NZS 4586:2004 Appendix D
TYPE	OIL-WET Ramp
RATING	Mean overall acceptance angle = 35° Class R13

Luminance Testing

Compliance for Luminance contrast varies with colour tactile and the substrate onto which you wish to have them installed. Certification of compliance would require testing of the tactile on your surface.